



ACCESSOIRES pour SR 4670 et SR 4680

VUE ECLATEE

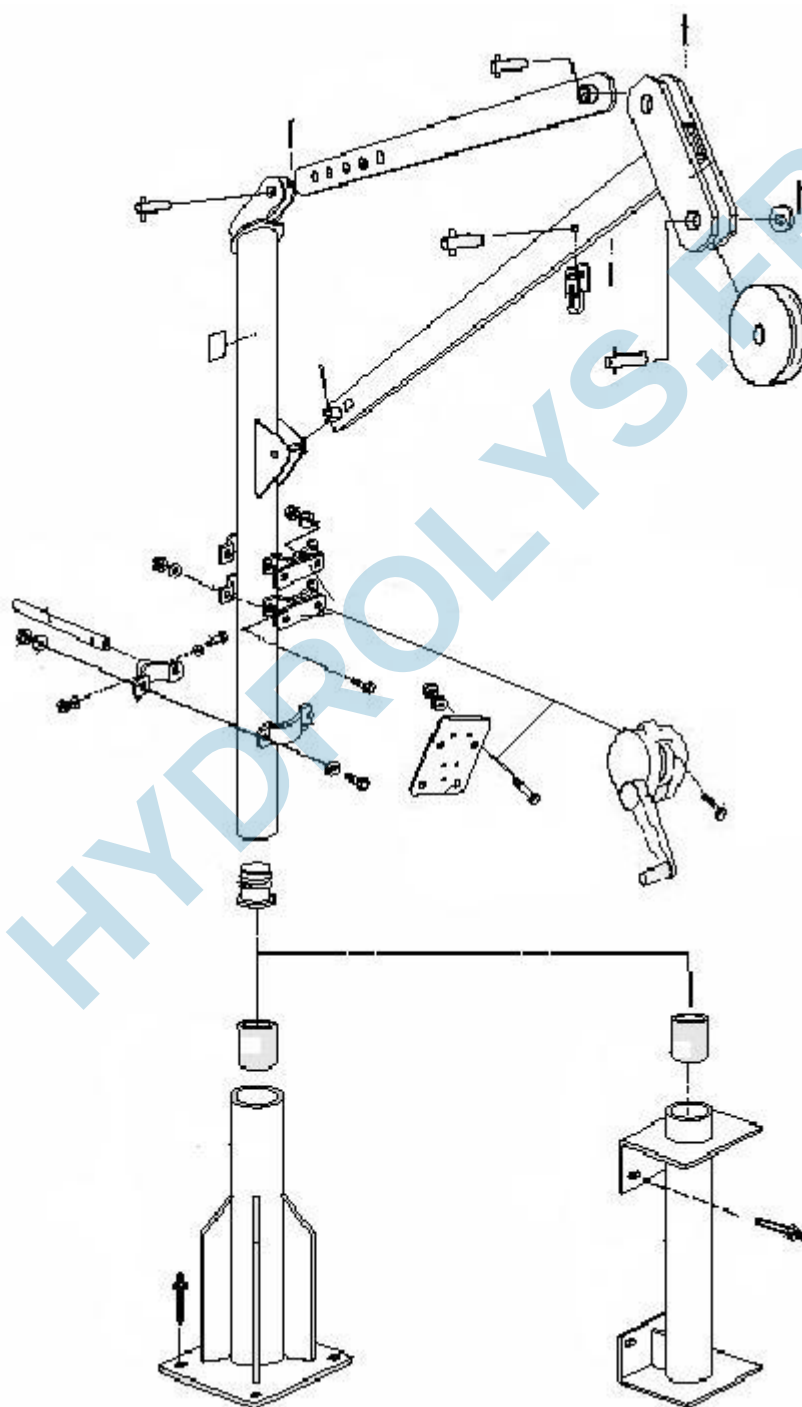

SUPPORT DE POTENCE HORIZONTAL (TREUIL et PALAN)

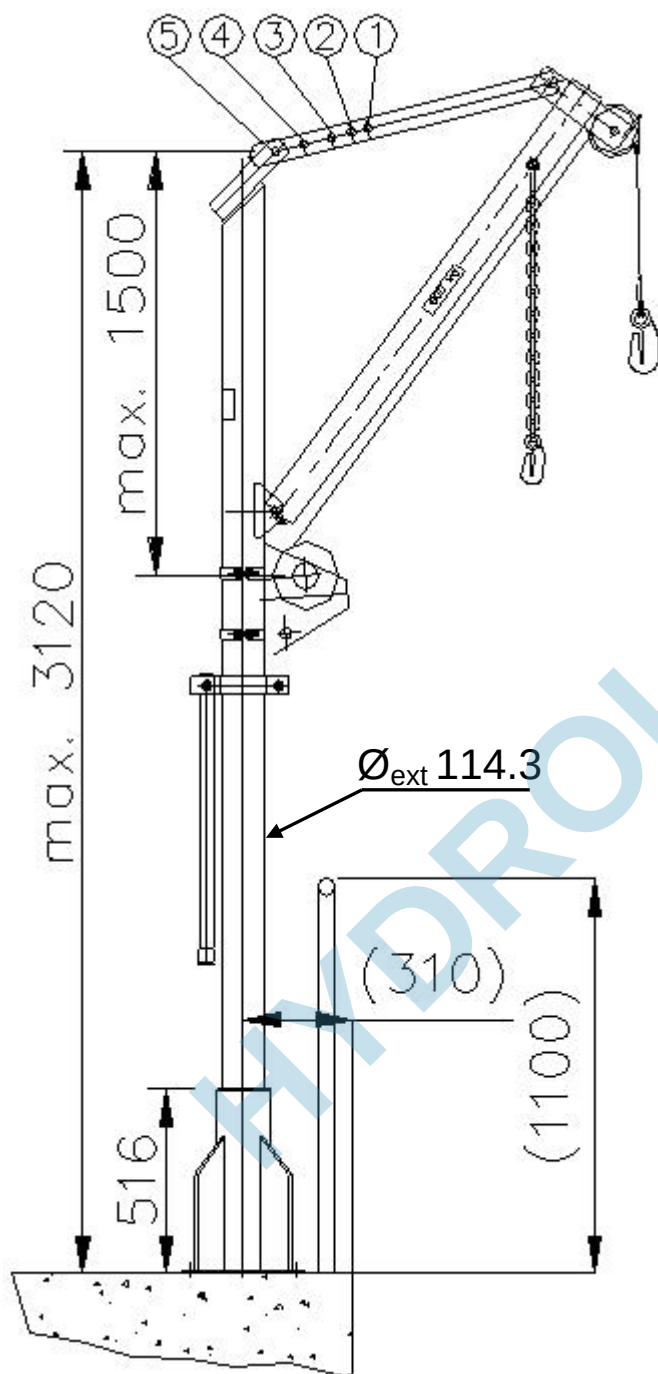


	Flèche D (mm)
(1)	750
(2)	825
(3)	910
(4)	1010
(5)	1100

Position de la poulie en fonction de l'orientation de l'agitateur

	0°	+/- 10°	+/- 20°	+/- 30°	+/- 40°	+/- 50°	+/- 60°
SR 4650	(4)	(4)	(3)	(3)	(2)	(2)	(1)
SR 4660	(5)	(5)	(4)	(4)	(3)	(2)	(1)

SUPPORT DE POTENCE VERTICAL (TREUIL et PALAN)

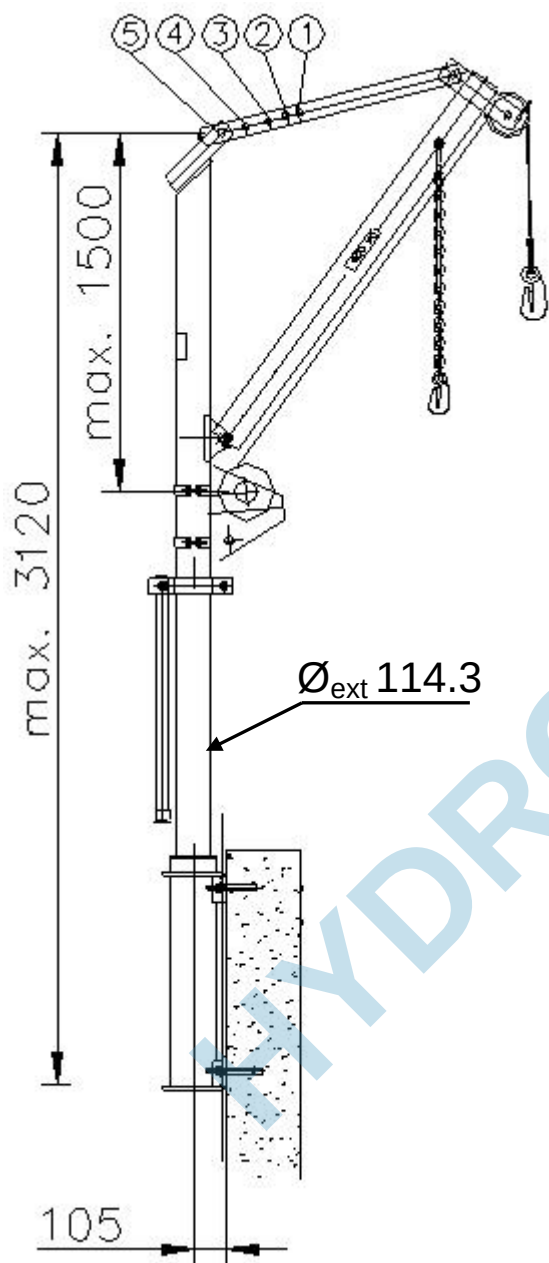


	Flèche D (mm)
(1)	750
(2)	825
(3)	910
(4)	1010
(5)	1100

Position de la poulie en fonction de l'orientation de l'agitateur

	0°	+/- 10°	+/- 20°	+/- 30°	+/- 40°	+/- 50°	+/- 60°
SR 4650	(4)	(4)	(3)	(3)	(2)	(2)	(1)
SR 4660	(5)	(5)	(4)	(4)	(3)	(2)	(1)


AXES DE LEVAGE

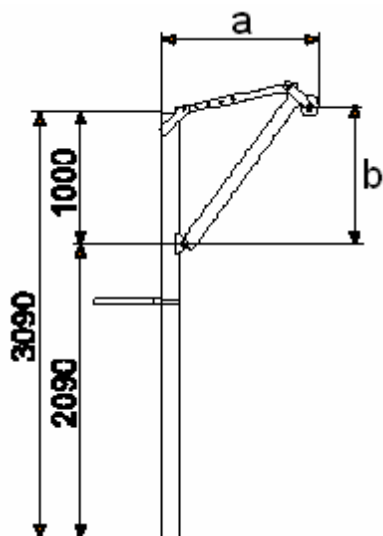

a	b
1100	1058
1010	1131
910	1200
825	1246
750	1282


RESERVATIONS

SUPPORT DE POTENCE HORIZONTAL

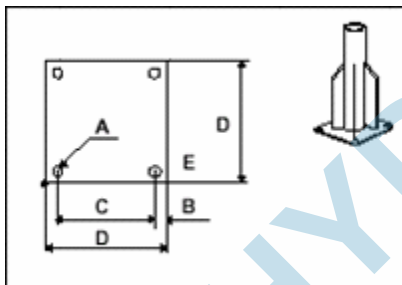

A	B	C	D
18	20	150	340

SUPPORT DE POTENCE VERTICAL

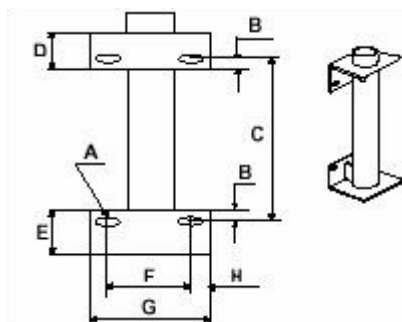

A	B	C	D	E	F	G	H
18	50	600	110	120	190	260	35