



ACCESSOIRES pour SR 4650 et 4660

VUE ECLATEE

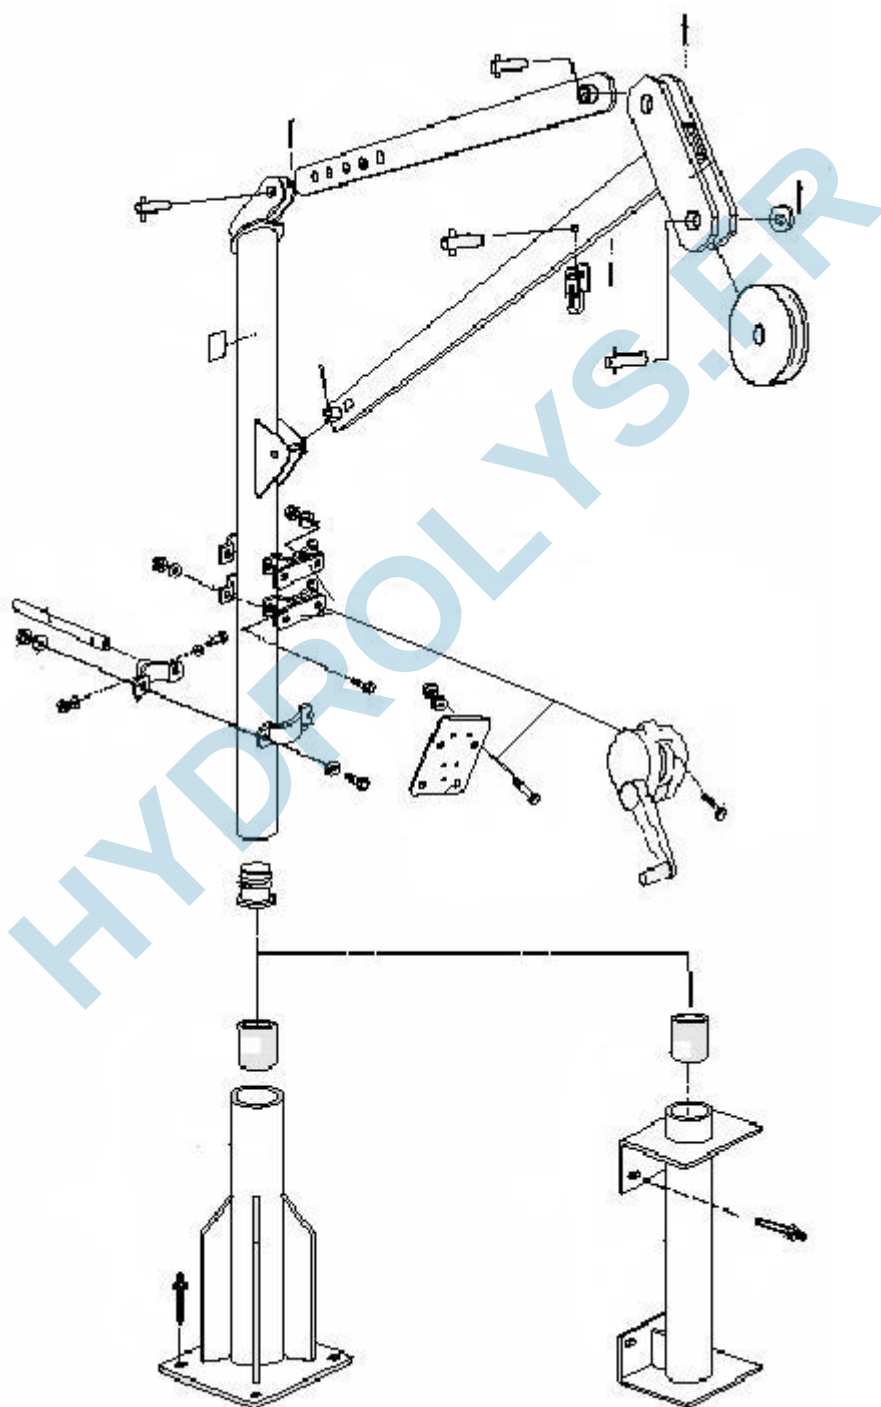

SUPPORT DE POTENCE HORIZONTAL AVEC TREUIL

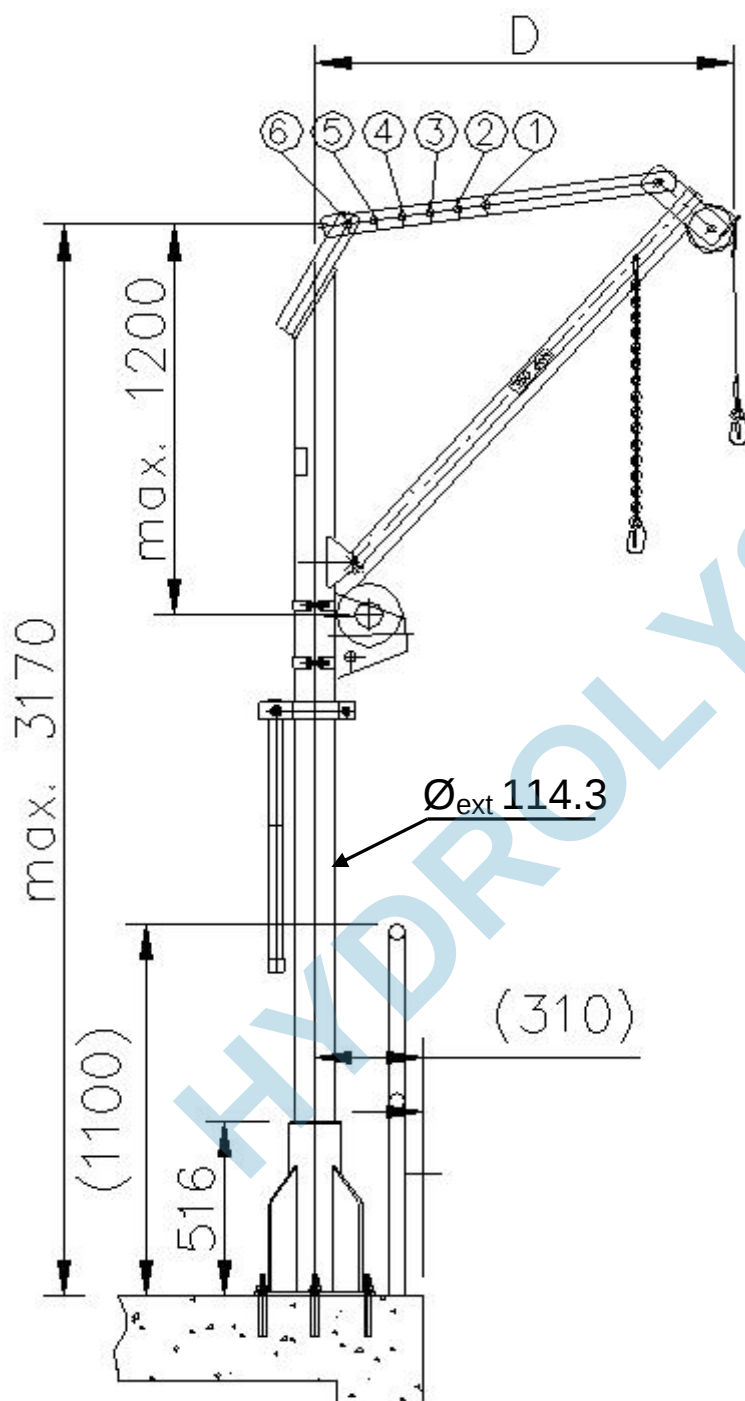


	Flèche D (mm)
(1)	650
(2)	840
(3)	923
(4)	1025
(5)	1117
(6)	1200

Position de la poulie en fonction de l'orientation de l'agitateur

	0°	+/- 10°	+/- 20°	+/- 30°	+/- 40°	+/- 50°	+/- 60°
SR 4650	(3)	(3)	(3)	(2)	(2)	(2)	(1)
SR 4660	(3)	(3)	(3)	(3)	(2)	(2)	(1)

SUPPORT DE POTENCE HORIZONTAL AVEC PALAN

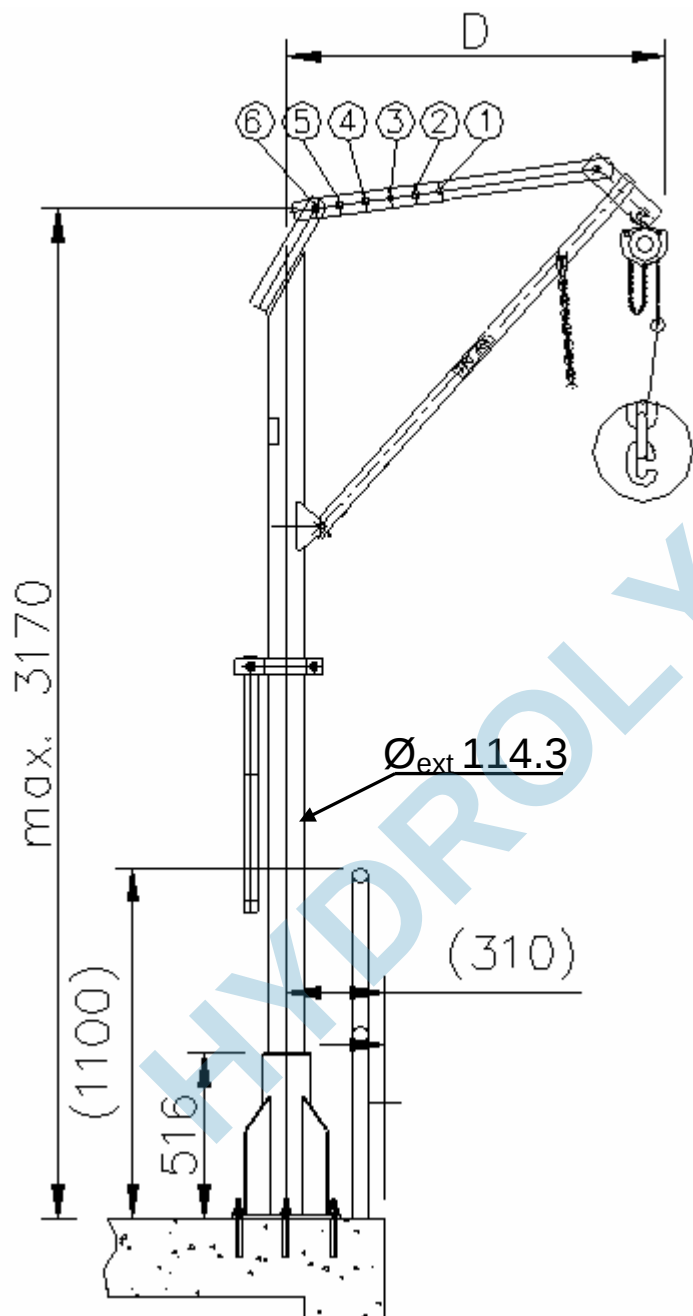


	Flèche D (mm)
(1)	650
(2)	840
(3)	923
(4)	1025
(5)	1117
(6)	1200

Position de la poulie en fonction de l'orientation de l'agitateur

	0°	+/- 10°	+/- 20°	+/- 30°	+/- 40°	+/- 50°	+/- 60°
SR 4650	(3)	(3)	(3)	(2)	(2)	(2)	(1)
SR 4660	(3)	(3)	(3)	(3)	(2)	(2)	(1)

SUPPORT DE POTENCE HORIZONTAL (TREUIL ou PALAN)

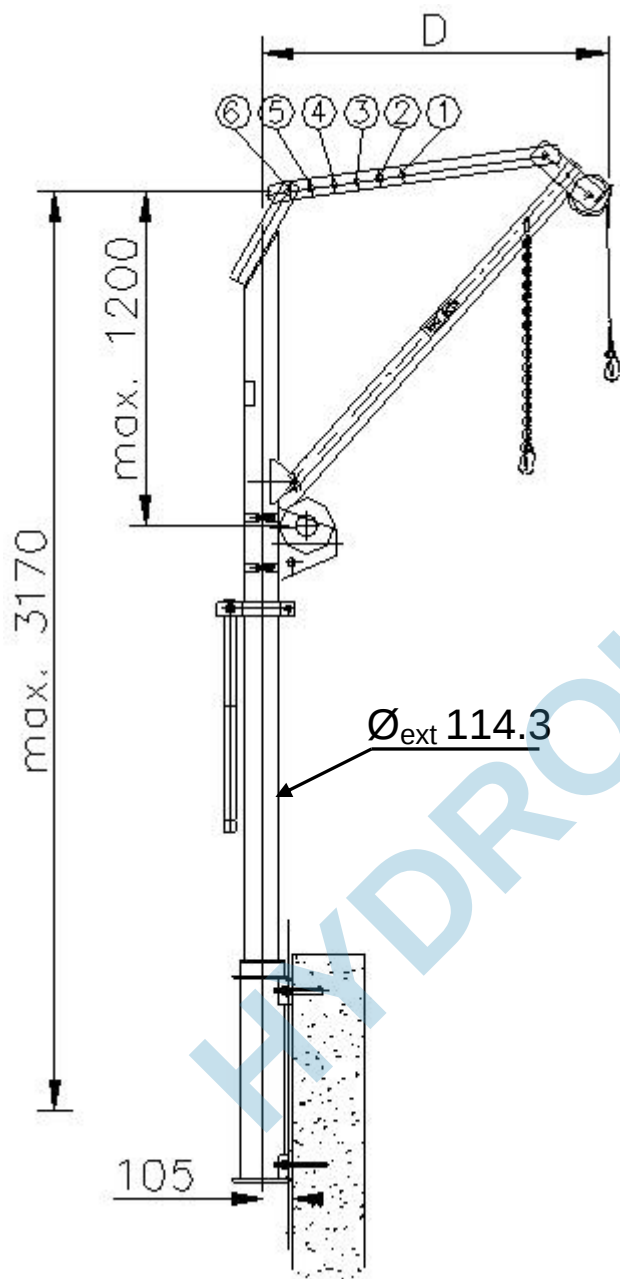


	Flèche D (mm)
(1)	650
(2)	840
(3)	923
(4)	1025
(5)	1117
(6)	1200

Position de la poulie en fonction de l'orientation de l'agitateur

	0°	+/- 10°	+/- 20°	+/- 30°	+/- 40°	+/- 50°	+/- 60°
SR 4650	(3)	(3)	(3)	(2)	(2)	(2)	(1)
SR 4660	(3)	(3)	(3)	(3)	(2)	(2)	(1)


AXES DE LEVAGE

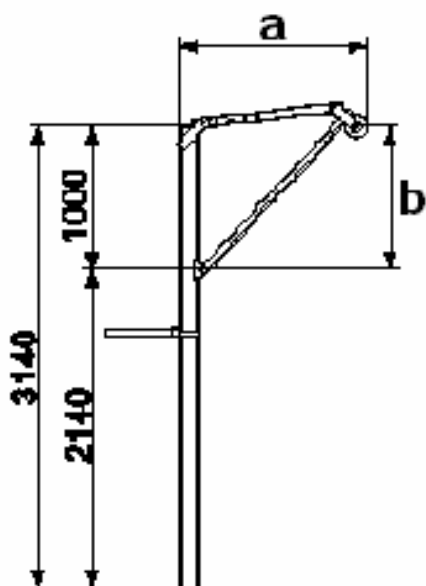

a	b
1200	987
1117	1066
1025	1141
923	1210
840	1258
650	1346


RESERVATIONS

SUPPORT DE POTENCE HORIZONTAL

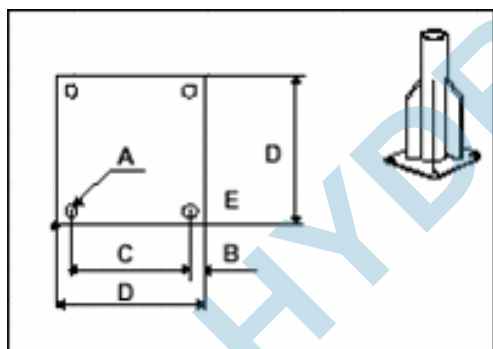

A	B	C	D
18	20	150	340

SUPPORT DE POTENCE VERTICAL

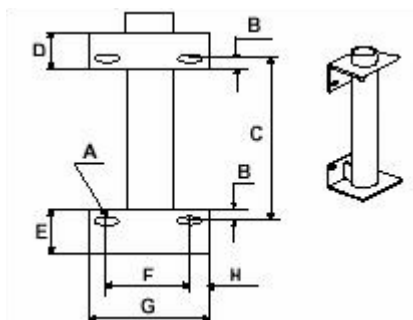

A	B	C	D	E	F	G	H
18	50	600	110	120	190	260	35