


Position	Quantité	Description
	1	DUOLIFT.270.AP50B.50.11.3  Note ! La photo produit peut différer du produit réel Référence: 99017759 Wastewater collecting tank with a total volume of 270 liter. Incl. pipeset to assemble on site with two pump of type UNILIFT AP50B.50.11.3 Effective pump volume per operation cycle from 31 up to 152 liter. Discharge performance of 1,8 to 9 m³/h. Effective pump volume can be adjusted by controller setting. Large assembly and service inspection cover ø380mm, screwed. Connection ports: 1 x horizontal inlet DN100 with space saving inlet socket at a center height of 180mm 1 x horizontal inlet DN100 with space saving inlet socket at a center height of 520mm 1 x vertical inlet DN100 with space saving inlet socket (incl. 1 x DN100 socket sealing) 1 x DN40 connection mit space saving socket to connect e.g. a diaphragm pump (incl. 1x DN40 socket sealing) 1 x DN75/50 venting connection with PVC port (ø63), of PP-socket Muffe DN75 or possible to use a flexibler connecting piece DN75 Pre-assembled pipe clamps of sensor pressure tube DN50 delivered with a controller LC220/LC220 Tank according to EN12050-1 and -2 type tested and monitored by external institute. Note: "Assembly to a complete lifting station according to EN12050 requires pumps, non return valve, manual start option (part 1) and high water alarm as minimum incl. level sensing. These components are not part of the delivery Components delivered to be assembled on site." Recommended controller LC221.2 with up to 5 pre-set values of start/stop/alarm and incl. sensor pressure tube. Material: Collecting tank: Polythylen (PE) cover/lid: Polythylen (PE) Screws: Galvanized Steel Socket sealing: Styrene Butadiene (SBR) Piping parts: Polyvinyl Chloride (PVC) and Polypropylen (PP) Tank dimensions: l x w x h: 700x600x750 mm Weight: 50.9 kg

Position	Quantité	Description
		Liquide: Liquide pompé: Eau Température liquide maximum: 40 °C Liquid temperature during operation: 20 °C Masse volumique: 998.2 kg/m³ Technique: Type de roue mobile: VORTEX Taille maximum des impuretés: 50 mm Homologation CE (Oui/Non): O EN number for LGA approval: 12050-1 Donnée électrique: Puissance absorbée - P1: 1.75 kW Puissance nominale - P2: 1.1 kW Fréquence d'alimentation: 50 Hz Tension nominale: 3 x 380-420 V Tolérance tension: +6/-10 % Nbre max. de démarrages par heure: 60 Courant nominal: 2.81 A Cos phi - Facteur de puissance: 0,90 Vitesse nominale: 2785 mn-1 Nombre de pôles: 2 Méthode de démarrage: direct Indice de protection (IEC 34-5): IP68 Classe d'isolement (IEC 85): F Câble principal: 1.5 m Réservoir: Volume total du (des) réservoir(s): 270 l Volume effectif total du réservoir avec entrée 180mm: 31 l Volume effectif total du réservoir avec entrée 250mm: 152 l Autres: Poids net: 50.9 kg Poids brut: 63.2 kg Country of origin: FR Custom tariff no.: 84137021

99017759 DUOLIFT.270.AP50B.50.11.3 50 Hz

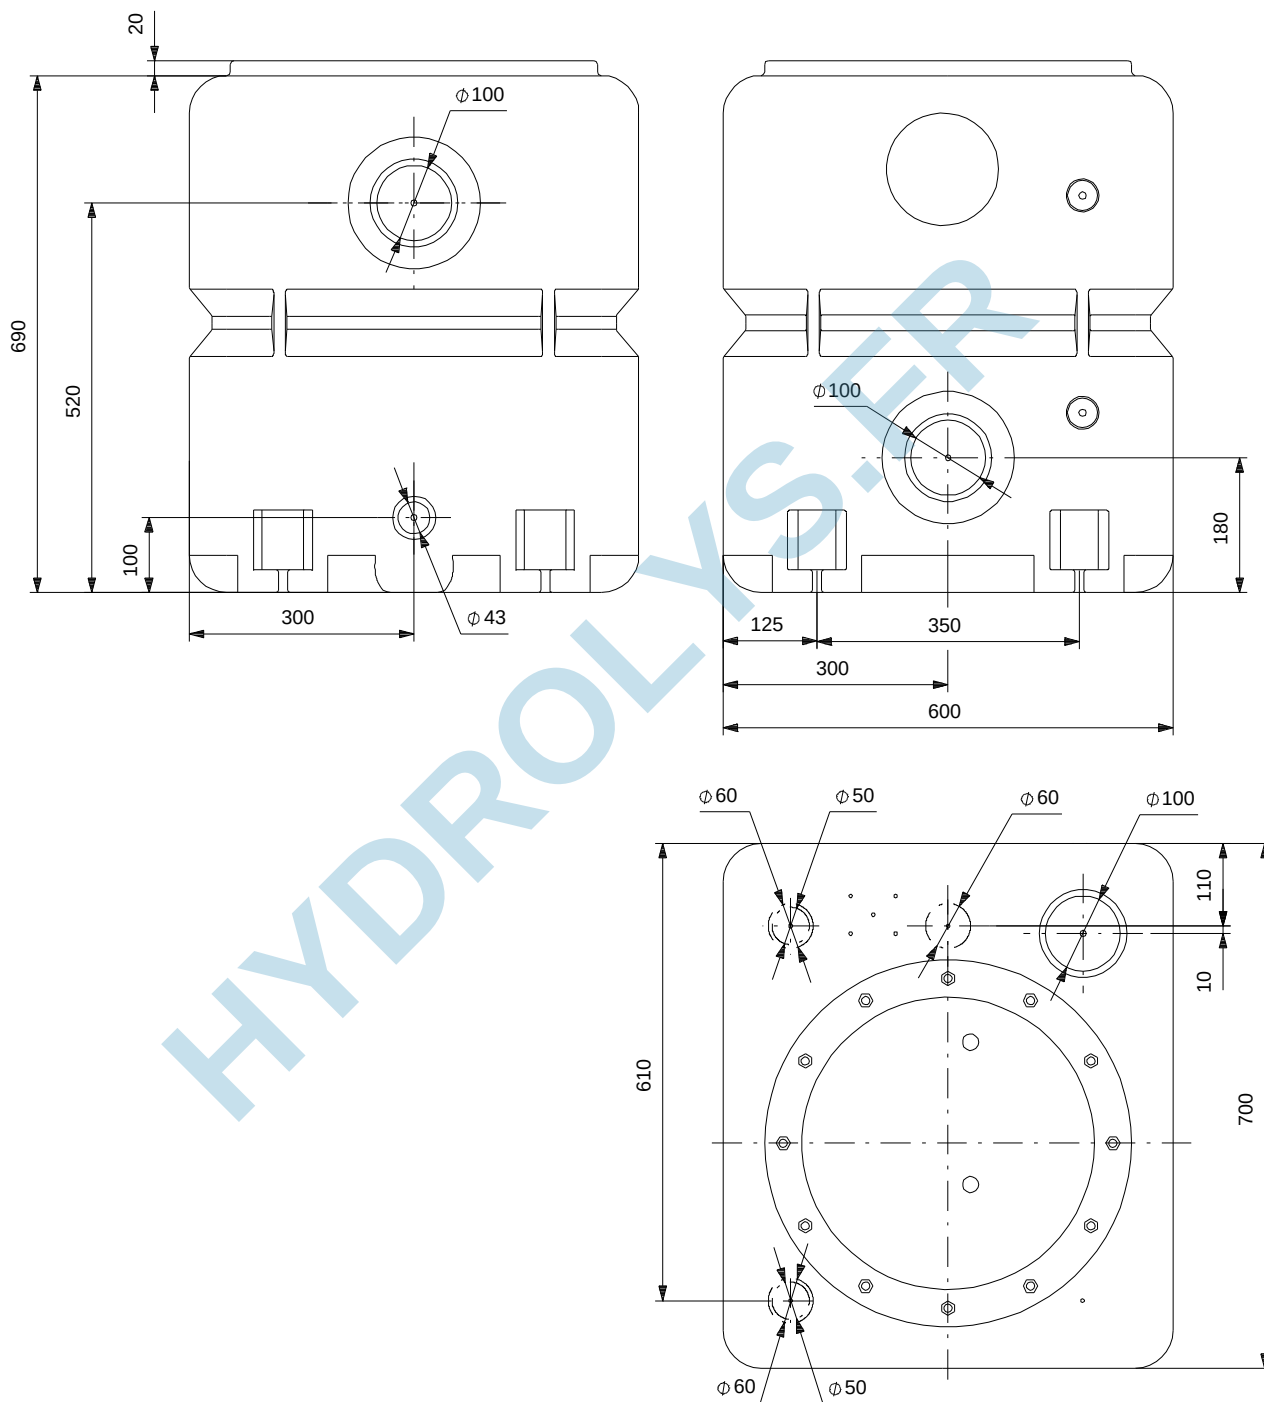

Remarque: toutes les unités sont en [mm] à moins que d'autres unités soient énoncées.
 Mise en garde: ce dessin d'encombrement simplifié ne montre pas tous les détails.