



# XP series

XP-60 / XP-80

- Oxygen supply for fish breeding
- Septic tank  
(Biological contact aeration)
- Air injection for bubble bath
- Small capacity compressor



## Specifications

		XP-60		XP-80	
Rated Voltage	V	AC220 - 240			
Power Supply Frequency	Hz	50	60	50	60
Rated Loading Pressure	kPa	14.7			
Airflow Volume	ℓ/min	60		80	
Power Consumption	W	39		58	
Noise Level	dBA	35		36	
Weight	kg	4.3			

\* Above data is reference for catalogue

## Performance Curves


— Rated Loading Pressure (kPa)      — 50Hz      — 60Hz  
 ■ Working Pressure Range (XP-60 = 8-18kPa / XP-80/80 = 13-18kPa)

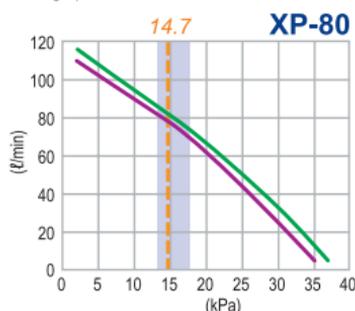

\* Above graphs are reference for catalogue

## Dimensions

(UNIT : mm)

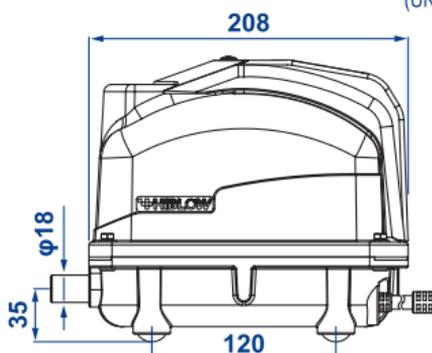

\* Materials may be modified without notice.

\* "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.