INTEGRA METERING

# RUBIN® SONIC

Ultrasonic water meter
Ultraschall-Wasserzähler
Compteur d'eau à ultrasons
Contatore d'acqua ad ultrasuoni

Installation guide
Montageanleitung
Instructions de montage
Instruzioni di montaggio

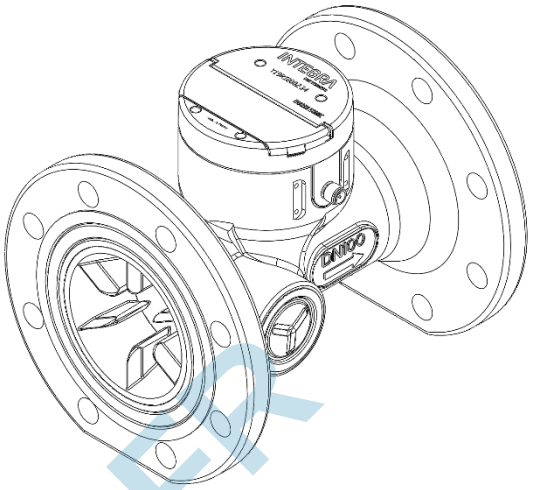

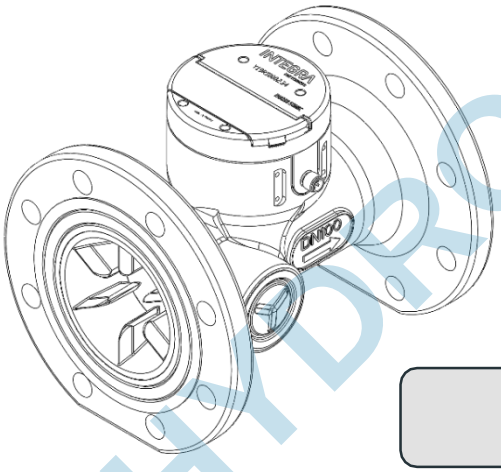

RSO




max.
+70°C
+158°F

min.
-20°C
-4°F

2 weeks of storage
max. at T>35°C / 95°F

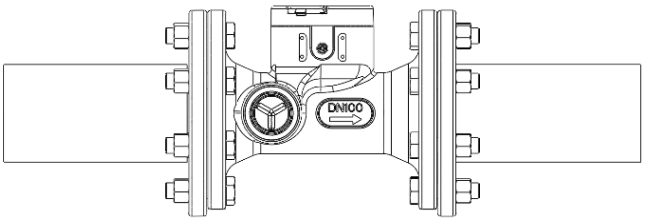

Torque: min. 30 N.m, max. 50 N.m

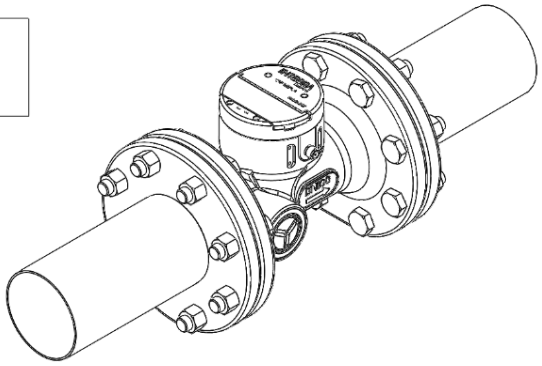

HYDROLYS.FR

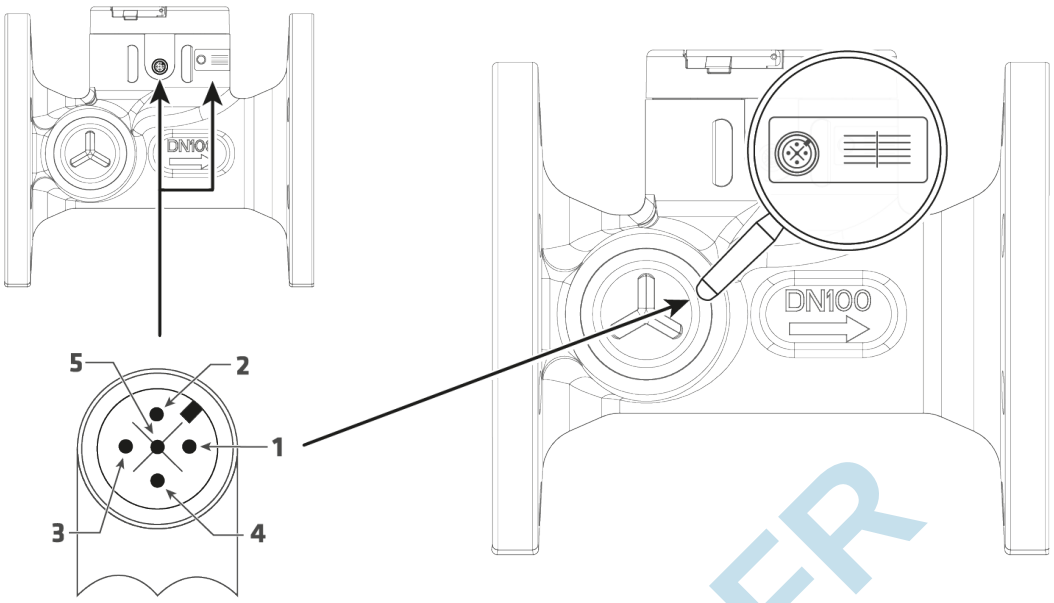


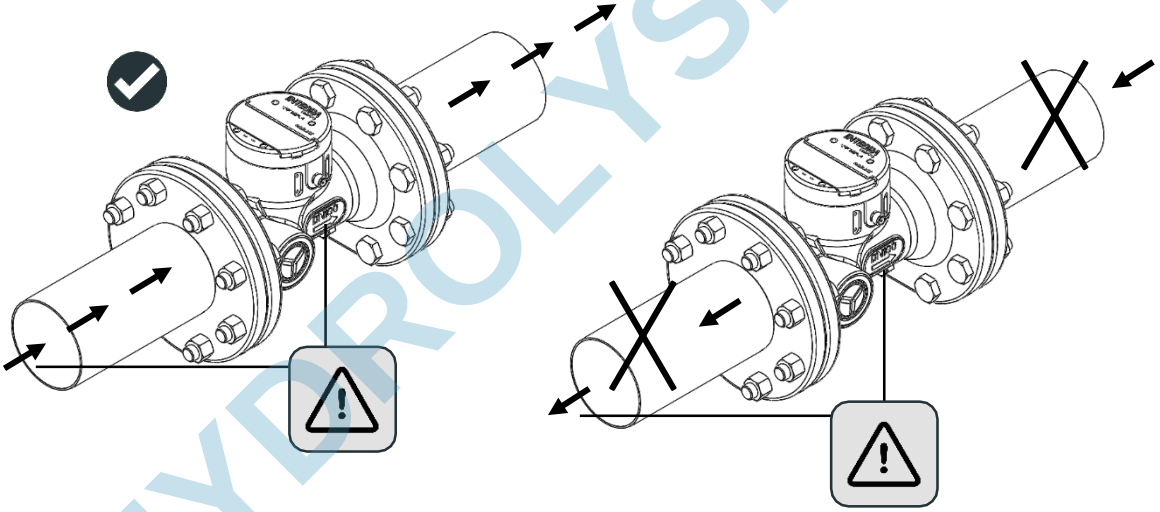

PROG

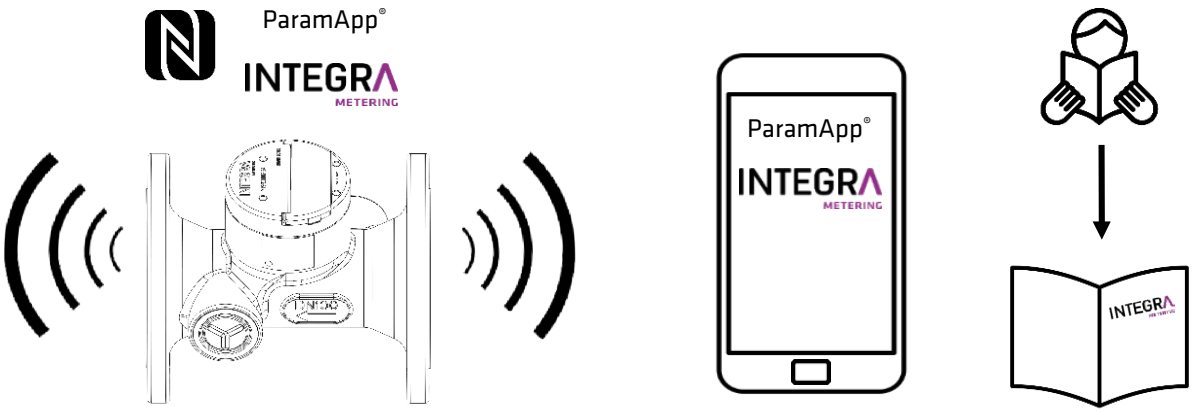


HYDROLYS.FR

Serial number
(including year of manufacture)

Name according to MID
Diameter

Battery expiration date

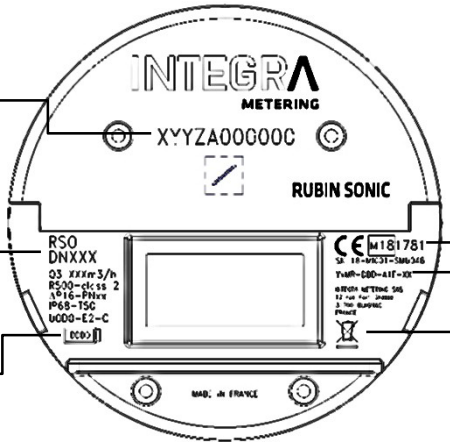


CE Marking and
code of MID lab

Part number
DDD: Diameter
A1F: Flange type
XX: Output mode

Elimination mode

Max. 55°C / 131°F
Min 0.1°C / 32°F

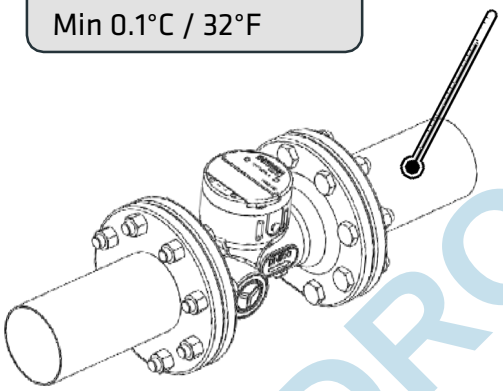

15 YEARS OF
BATTERY LIFE

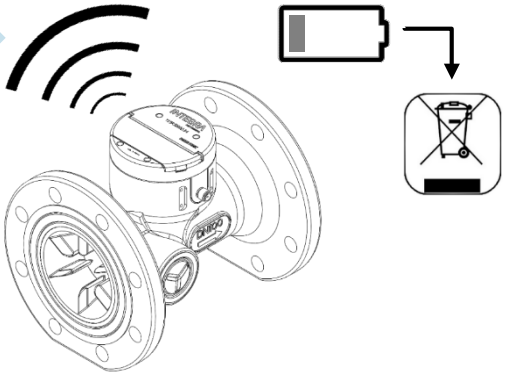

max. 16 Bar

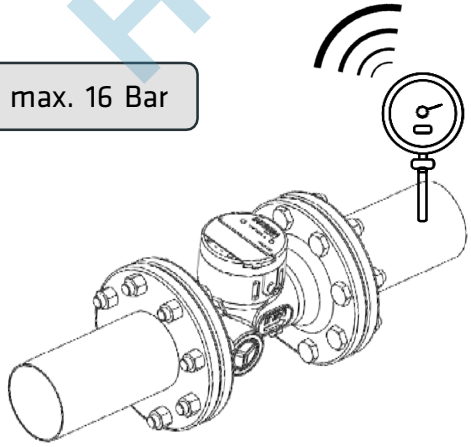

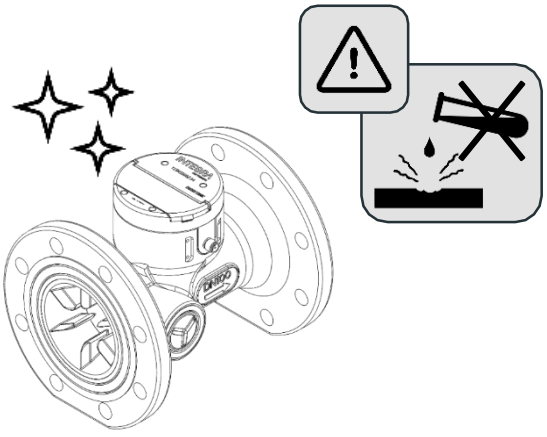

www.integra-metering.com

INTEGRA Metering AG
Ringstrasse 75, CH-4106 Therwil
Tel. +41 61 725 11 22

HYDROLYSFR

INTEGRA METERING

Scan the QR code below to view the EU Declaration of Conformity (DoC):

HYDROLYS.FR